Waveguide-Coax Adapter

DATASHEET

RIGHT ANGLE WR28 WG-COAX ADAPTER								
MODEL NUMBER	**WG SIZE**	**FREQ. (GHz)**	**INSERTION LOSS (dB)**	**VSWR MAX**	**FLANGE**	**CONNECTOR**	**CW POWER (W)**	**PEAK POWER (kW)**
WGC28A-F6-C5-ITI	WR28	26.5-40.0	0.39	1.25	COVER	2.92MM F	50	1

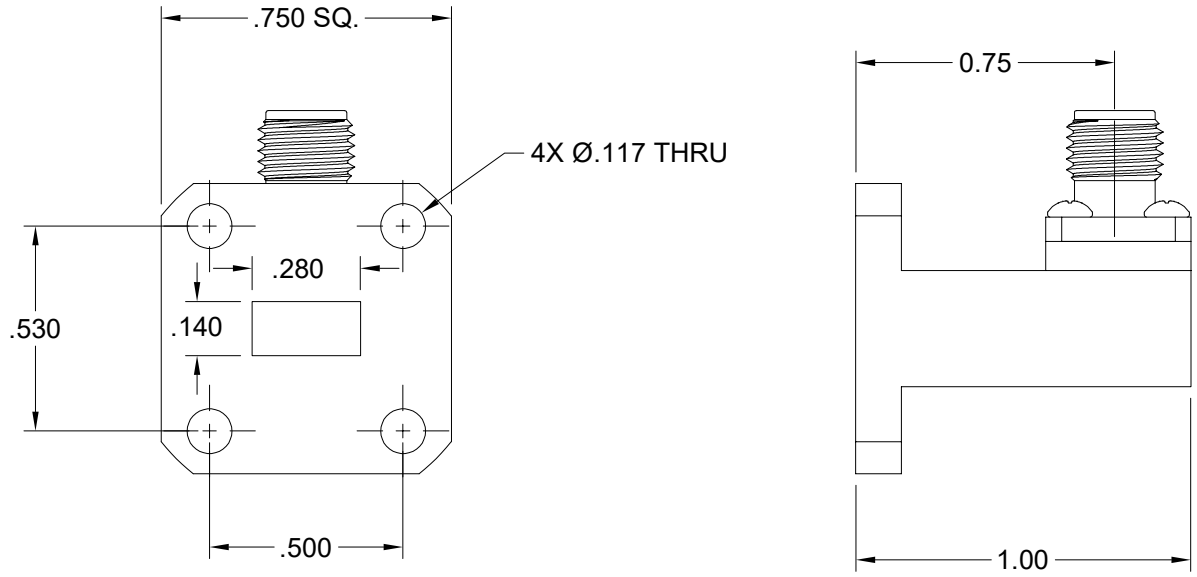

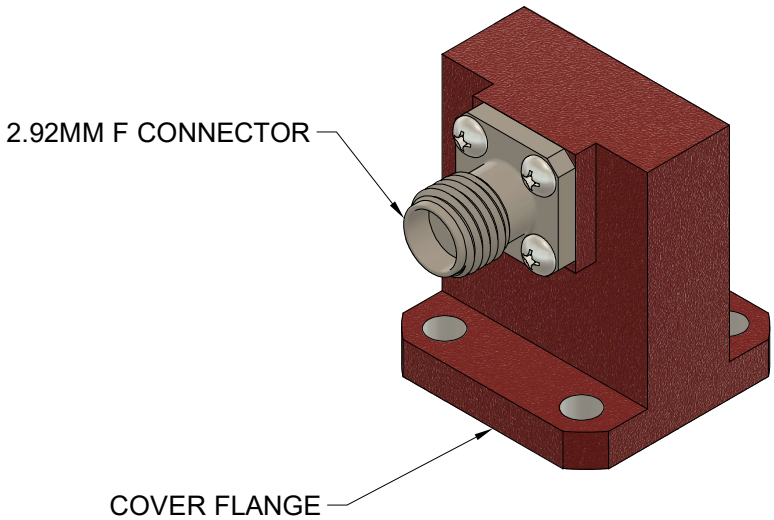

1989 Union Blvd, Bay Shore, NY 11706 USA
Tel: 631-968-4116 Fax: 631-968-8339
Website: www.impulse-tech.com

RoHS compliant

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/6/2024	DA

REVISION HISTORY