Waveguide-Coax Adapter

DATASHEET

RIGHT ANGLE WR62 WG-COAX ADAPTER								
MODEL NUMBER	WG SIZE	FREQ. (GHz)	INSERTION LOSS (dB)	VSWR MAX	FLANGE	CONNECTOR	CW POWER (W)	PEAK POWER (kW)
WGC62A-F6-C1-ITI	WR62	12.4-18.0	0.27	1.25	COVER	SMA F	50	1

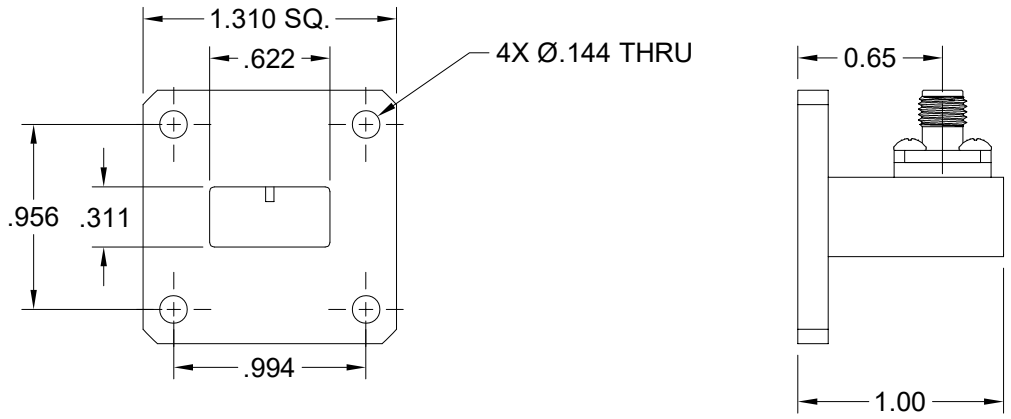

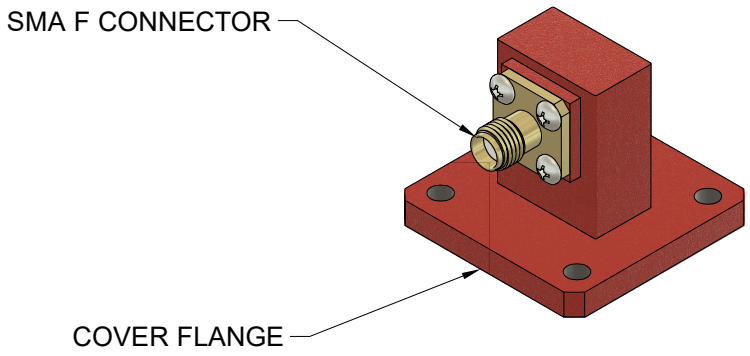

1989 Union Blvd, Bay Shore, NY 11706 USA
Tel: 631-968-4116 Fax: 631-968-8339
Website: www.impulse-tech.com

RoHS compliant

REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	5/6/2024	DA

REVISION HISTORY