


DATASHEET

RIGHT ANGLE WR137 WG-COAX ADAPTER								
MODEL NUMBER	WG SIZE	FREQ. (GHz)	INSERTION LOSS (dB)	VSWR MAX	FLANGE	CONNECTOR	CW POWER (W)	PEAK POWER (kW)
WGC137A-F1-C3-ITI	WR137	5.85-8.20	0.15	1.15	CPRF	TYPE N F	100	3
WGC137A-F1-C1-ITI	WR137	5.85-8.20	0.15	1.15	CPRF	SMA F	100	3

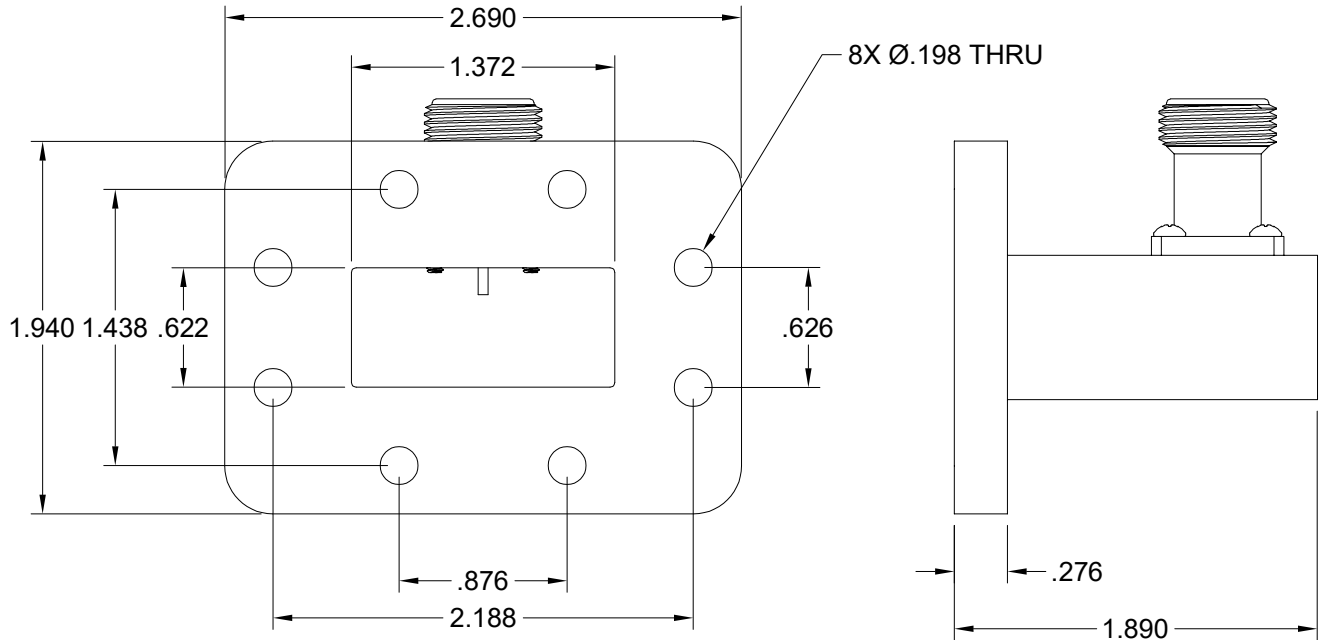

CONNECTOR :
TYPEN F, SMA F AVAILABLE

CPRF FLANGE

